


Technical data sheet F515

Specification Boat-shaped table, 2-parts 1300/1000x4000 mm

Dimensions in mm

Total:	H:	740
	W:	1300/1000
	D:	4000

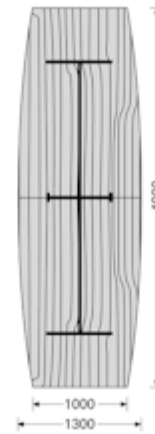

Packaging data	Weight:	kg	121
	Volume:	m³	1,18

Basic equipment

Benefit

Substructure	Three standing frames with a central longitudinal member.	A very robust substructure.
Standing frame	Steel frame with aluminium die-cast cantilever feet. Round tubular steel, 60 mm diameter, with slots to receive the longitudinal member.	Component construction allows economical manufacture with an appealing design.
Tabletop support	Sheet steel stiffened by its U-shaped forms, in the same colour as the table leg.	Highly rigid construction to allow heavy loading of the top, also at the edge.
Longitudinal member	Rectangular steel tubing 80 x 25 mm. Equipped on both sides with suspension hooks to enable connection with the standing frame without the need for tools. Top of member to provide central support of the tabletop. Surface: black coated.	Assembly stages that do not require tools save time. Simple disassembly. The central support prevents the tabletop sagging.
Frame surface	Black coated.	Matches all tabletop surfaces in the range.
Glides	Adjustable glides, black.	These compensate for uneven standing surfaces and ensure the stability of the table at all times.
Tabletop	MDF board 30 mm thick.	A very rigid, robust top.
Shape of top	Boat-shaped, two-part.	Ideal as a solitary table offering a good view of the entire table from all seating positions.
Top surface	Covered in CPL laminate. 0,8 mm thick, highly scratch-resistant, lightfast, good resistance to burning cigarette stubs. Light grey finish.	Surface ideal for rough use. Long-term safeguarding of investment.
Top underside	Backing material in the same quality as the surface.	Protects the top from warping.
Tabletop edge	ABS, 3 mm thick, colour matched to the top surface. The edges are bevelled to approx. 13 mm (at an acute angle of 30 degrees). The slanted surface is treated with clear varnish.	Beveling the top edge gives the table a more stylistic appearance.
Connection of substructure to top	The top and the support structure are screwed together by means of a threaded insert set into the table board.	These are strong screw-connections which permit repeated assembly and disassembly.


Technical data sheet F515

Specification Boat-shaped table, 2-parts 1300/1000x4000 mm

Dimensions in mm

Total:	H:	740
	W:	1300/1000
	D:	4000

Packaging data	Weight:	kg	121
	Volume:	m³	1,18

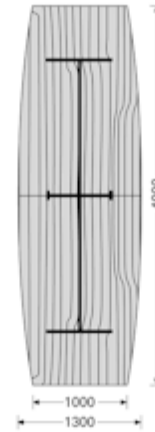

Certification

Quality Management Mystem DIN EN ISO 9001:2015, Regulation (EC) no. 1221/2009 (EMAS), Environmental Management System DIN EN ISO 14001:2015, Occupational Health and Safety Management System DIN EN ISO 45001:2018, Energy Management System DIN EN ISO 50001:2018, EcoVadis Gold, Commitment to sustainability.

High-quality product.

Warranty

10-year warranty according to our current warranty conditions.

Quality guaranteed to last for entire product life.


Technical data sheet F515

Specification Boat-shaped table, 2-parts 1300/1000x4000 mm

Dimensions in mm

Total:	H:	740
	W:	1300/1000
	D:	4000

Packaging data	Weight:	kg	121
	Volume:	m ³	1,18

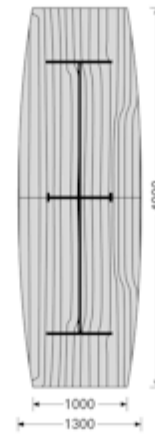

Options

Benefit

Frame surface

Standing frames are also available in brilliant silver. The tubular chromed steel legs have polished die-cast aluminium feet.

It is possible to match the frame surface to existing chairs.

Top surface

The material can be selected as desired from beech, maple, cherry, walnut, light oak - or clear varnished wood veneer (beech, maple, oak, cherry, walnut).

The wide selection of materials and wood veneers facilitates individual design and the matching of furniture to existing rooms and furnishings. This gives rise to high-quality ambience.

Accessories

Connection box for power supply and data transfer, capable of being turned and tilted in virtually any configuration, cable bushing in plastic or stainless steel, cable duct in drawn aluminium section, vertical cable routing etc, available on request.

Using tried-and-tested components from renowned manufacturers enables us to assure function reliability and operational safety.